

Connector Screws

GALVANISED - CLASS 3

Application

Bremick® Connector Screws are designed specifically for fastening connectors such as joist hangers, multi grips, triple grips etc to timber or metal substrates.

The Bremick® Connector Screws must be used with Bremick Connectors to ensure the design values and strength properties are met.


Advantages

Bremick® Connector Screws provides numerous benefits including:

- Self-drilling for quick installation.
- Hex Head offers positive engagement for ease of installation.
- Coloured head for easy on-site identification and certification.

Bremick® Ranging

Product Code	Dimensions	Coating	Pack Qty
SUHC3PU2350	SDMT 12-11 x 35mm HEX CLASS 3 PK50	Class 3 - Galvanised	50
SUHC3PU2356	SDMT 12-11 x 35mm HEX CLASS 3 PK250	Class 3 - Galvanised	250

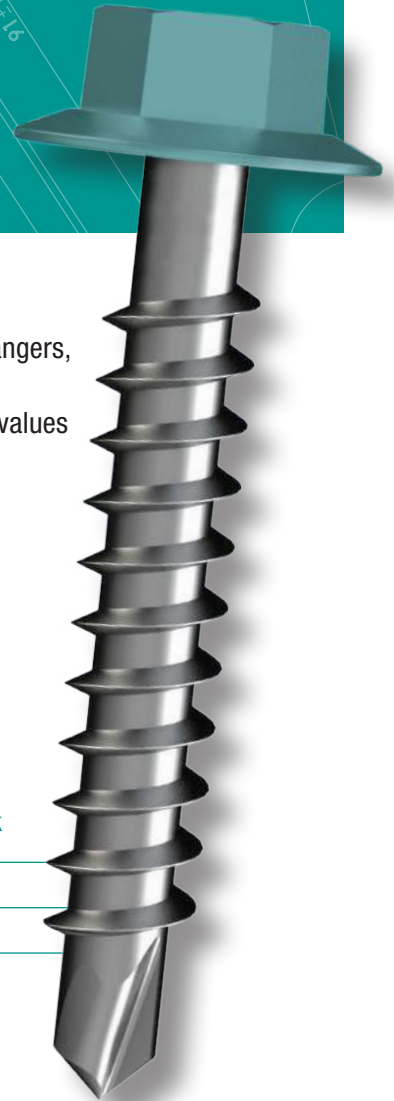

Installation Instructions

1

Insert driver bit into cordless tool and select low speed setting.

2

Place tip of screw in correct fastening location.

3

Apply firm pressure, until head of screw is firmly against connector.

4

DO NOT overdrive.