

Foil Insulation Fix Fasteners

GALVANISED

Application

The Bremick® Foil Insulation Fix Fasteners are for fixing insulation foil to timber framing.

Advantages

Bremick® Foil Insulation Fix Fasteners provide numerous benefits including:

- **Multi-use:** Can be used to fix foil insulation to both wall and roof frames
- **Withdrawal strength:** When fixed using the Bremick Timber Connector Nail it ensures an excellent holding power. When fixed to standard pine framing timber, the withdrawal resistance is greater than that of the foil.
- **Tear resistant design:** The rounded, coined edges and a wide surface area (30mm) significantly reduces the potential for the foil to tear in windy conditions




Specifications

Steel Grade	G300
Coating	Z275 – Galvanised
Thickness	0.6mm
Length A	30mm
Length B	30mm




Bremick® Ranging

Product Code	Dimensions	Coating	Pack Qty
TFFZ030030104	30mm x 30mm x 0.6mm	Z275 – Galvanised	500 (50 strips of 10)
TFFZ03003010C	30mm x 30mm x 0.6mm	Z275 – Galvanised	Carded - 50

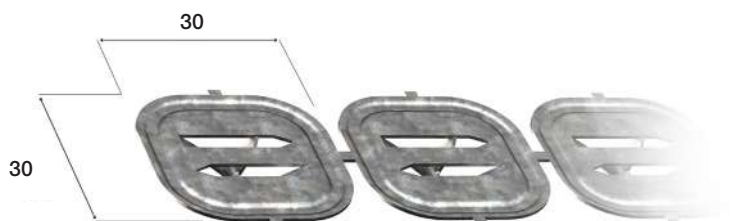

Installation Instructions

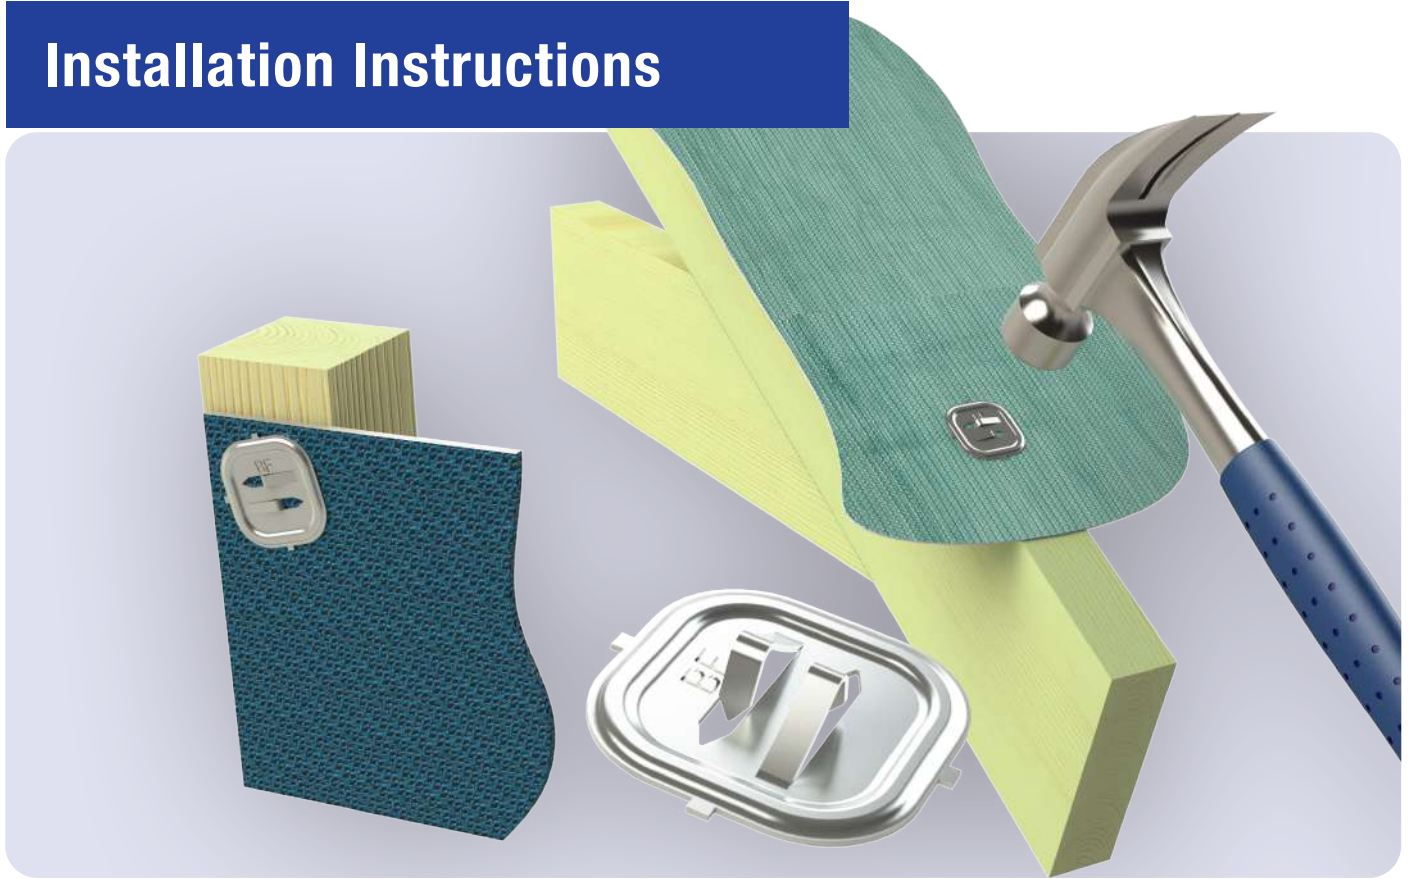

1

Place foil insulation into position.

2

Take a single foil fastener and locate it over the foil insulation in the desired position.

3

Drive in with hammer and twist to separate from the stick.