

Shade Cloth Fix

ZINC & POWDER COATED

Application

The Bremick® Shade Cloth Fix are for fixing woven and knitted shade cloth to timber framing.

Advantages

Bremick® Shade Cloth Fix provide numerous benefits including:

- **Rounded coined edge:** Designed to prevent the shade cloth tearing on the Shade Fix's edges. The product design also enables the cloth to be firmly held in position against the timber when the pre-punched nails are driven home.
- **Twisted nail profile:** ensures the Shade Fix can be used with the hardest timbers, while resisting pull-out in high wind conditions.
- **Packaged in a 5-piece easy snap-off stick:** for speed and safety during installation
- **Range of colours:** to match most popular shade cloth

Specifications


Steel Grade	G300
Coating	Zinc / Powder coated
Thickness	0.6mm
Length A	50mm
Length B	13mm



Bremick® Ranging

Product Code	Dimensions	Coating	Pack Qty
TSCG05001310C	50mm x 13mm x 0.6mm	Green	Carded - 50
TSCB05001310C	50mm x 13mm x 0.6mm	Black	Carded - 50
TSCE05001310C	50mm x 13mm x 0.6mm	Beige	Carded - 50
TSCZ05001310C	50mm x 13mm x 0.6mm	Zinc	Carded - 50

Installation Instructions

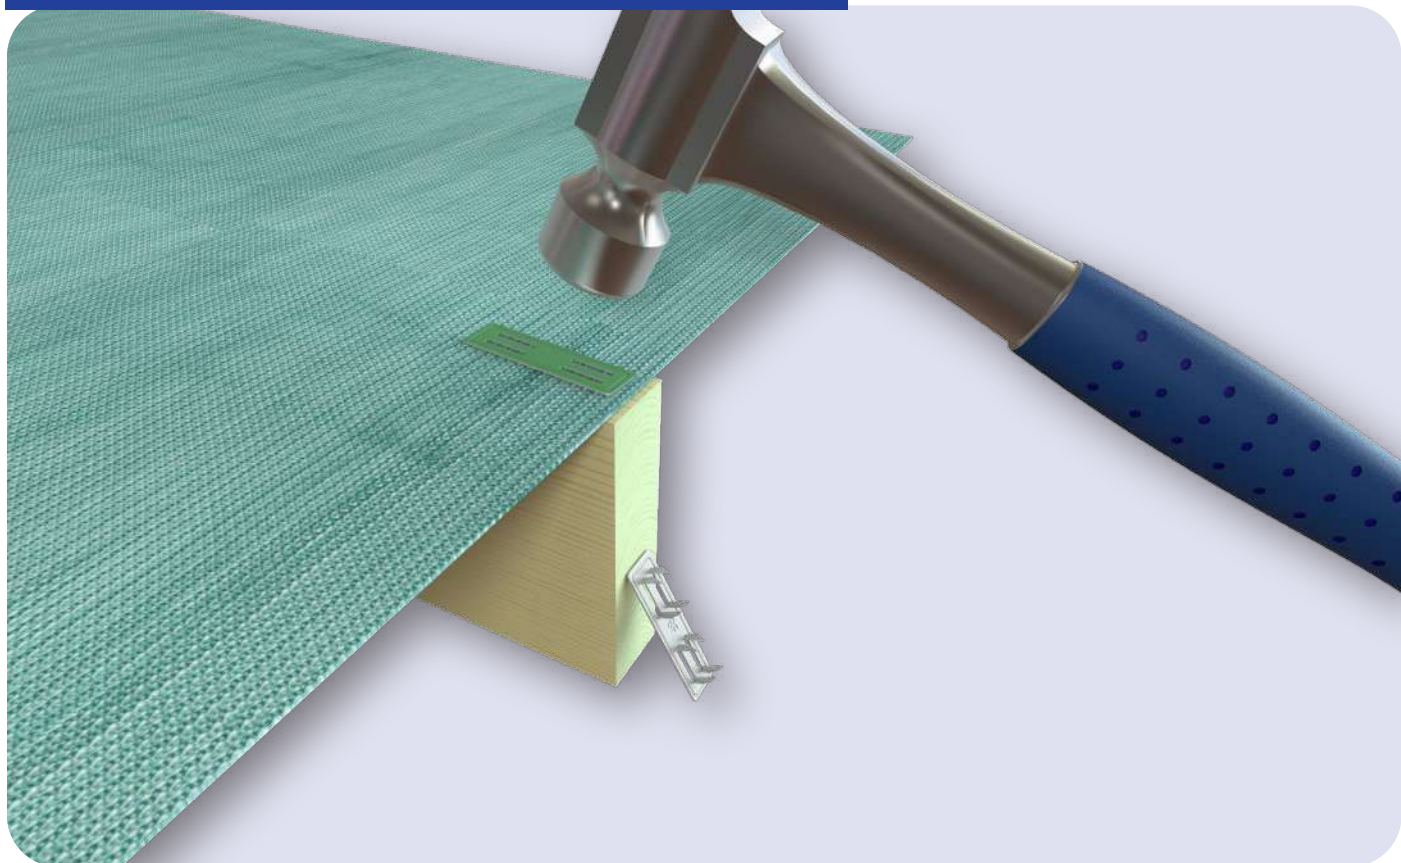

1

Place the Shade Fix approximately 5mm from the edge of the fabric or centrally on the timber batten.

2

Drive in with a hammer.

3

For maximum grip use Shade Fix at 300mm to 600mm intervals.

