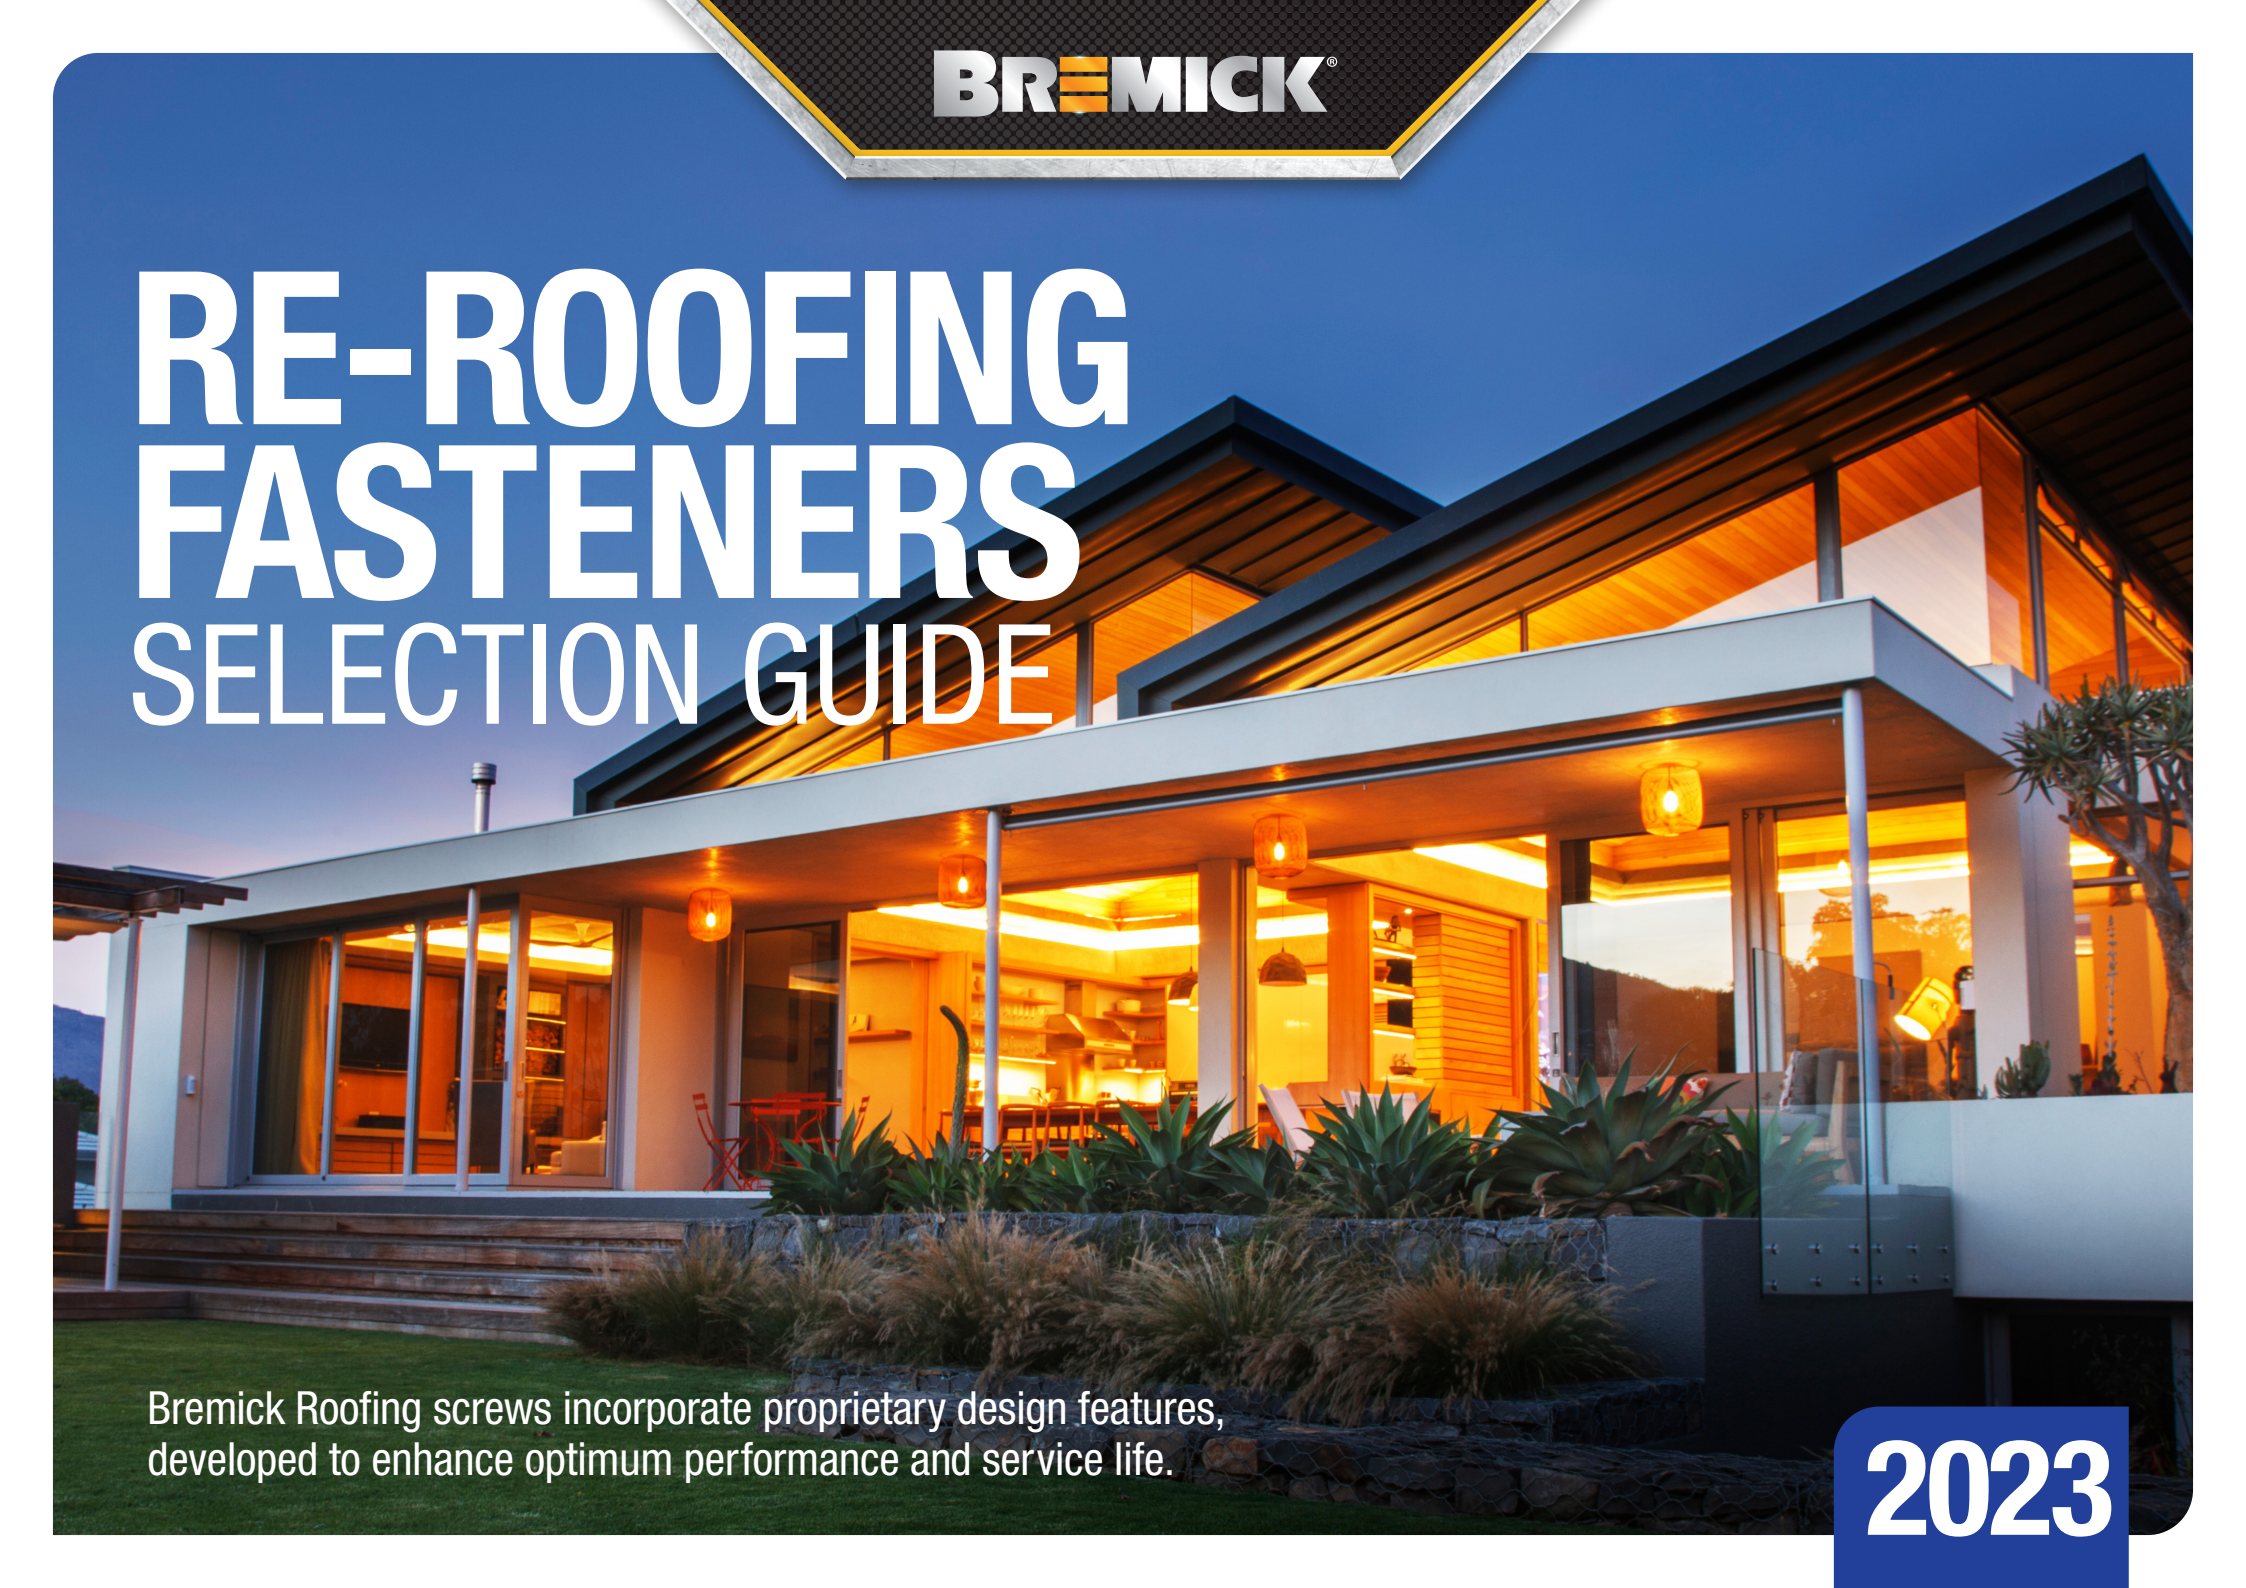


The logo for Bremick, featuring the word "BREMICK" in a bold, sans-serif font. The letter "E" is stylized with three horizontal bars. The logo is set against a dark, textured background with a yellow and white border.


RE-ROOFING FASTENERS SELECTION GUIDE

A photograph of a modern, two-story house at dusk. The house has large glass windows and a balcony. The interior lights are on, and the sky is a deep blue. The house is surrounded by landscaping, including a stone wall and various plants.


Bremick Roofing screws incorporate proprietary design features, developed to enhance optimum performance and service life.

2023


CORRUGATED SHEETING PROFILE

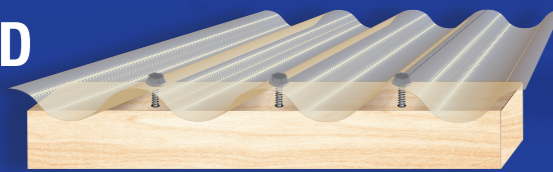

TO TIMBER

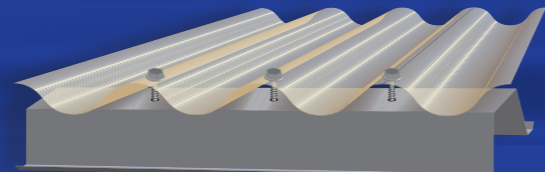


TO TOPHAT

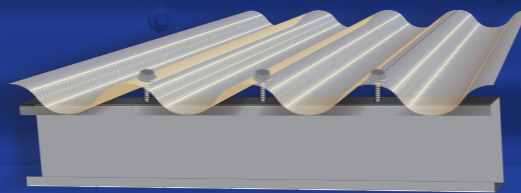


TO PURLIN


SQUARE RIB SHEETING PROFILE

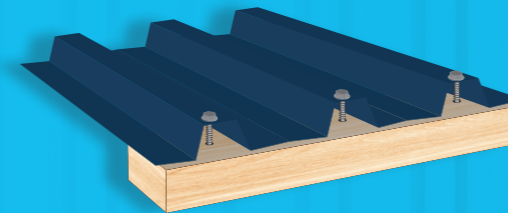

TO TIMBER

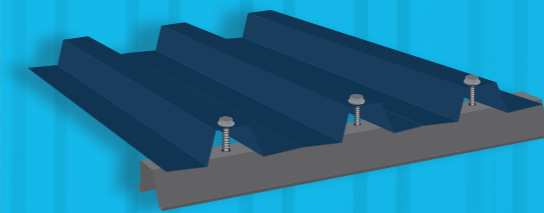

TO TOPHAT

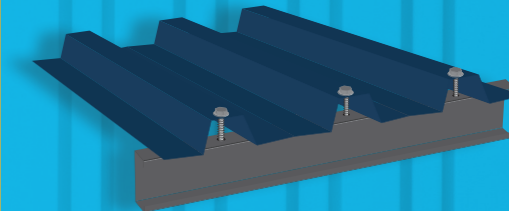

TO PURLIN


RE-ROOFING CREST FIXED



Vortex™ RE-ROOF universal screw
6.5-13 x 55 Hex B8 (Cat5) Top Grip™
Fixing to softwood or metal battens up to 1.5mm.
SUHT8650551



Vortex™ RE-ROOF universal screw
6.5-13 x 55 Hex B8 (Cat5) Top Grip™
Fixing to metal battens up to 1.5mm or softwood.
SUHT8650551




SDM ROOF
14-10 x 55 Hex B8 (Cat5) SEAL
Fixing to purlin from 1.0-5.5mm.
SMHC8140501


RE-ROOFING CREST FIXED




Vortex™ RE-ROOF universal screw
6.5-13 x 70 Hex B8 (Cat5) Top Grip™
Fixing to softwood or metal battens up to 1.5mm.
SUHT8650701



Vortex™ RE-ROOF universal screw
6.5-13 x 55 Hex B8 (Cat5) Top Grip™
Fixing to metal battens up to 1.5mm or softwood.
SUHT8650551



SDM ROOF
14-10 x 55 Hex Class 4 B8 (Cat5) SEAL
Fixing to purlin from 1.0-5.5mm thick.
SMHC8140501



Type 17 ROOF
14-10 x 50mm Hex Type 17 B8 (Cat5)
Fixing to softwood or hardwood.
STHC8140501

VORTEX™ RE-ROOF 5/16 DRIVE
Designed so existing roof screw can be removed and the larger 6.5mm body screw can be installed to avoid issues with pull out



REVOLUTIONARY PROTECTION & DRILLING PERFORMANCE

2X PROTECTION
MORE THAN DOUBLE the Corrosion protection of conventional Class 4 in category 5 environments.

8X TOUGHER
Than conventional Class 4 Extremely abrasion resistant. Minimal coating loss during installation.

30% FASTER DRILLING
Than conventional Class 4

CORROSION PROTECTION
More than double the Corrosion protection of conventional Class 4. Suitable for Very Severe corrosive environments (ISO 9223 Category 5).

WARRANTY
Fully warranted for ISO Category 5 Very Severe Environments.

DRILL DRIVE PERFORMANCE
30% Faster than conventional Class 4.

DURABILITY
Eight times tougher than conventional Class 4. Extremely abrasion resistant. Minimal coating loss during installation.

APPEARANCE
Smoother, finer & matched to ZINCALUME®.

CONFORMANCE
Exceeds AS 3566 Class 4.

COMPATIBILITY
COLORBOND® Steel & Ultra Steel, ZINCALUME®, Steel, Galvanized & Zinc coated products, ACQ & treated timber.

ROOFING FASTENERS COLORBOND® COLOURS






Dover White™	Surfmist®	Evening Haze/Summershade®	Classic Cream™	Paperbark®	Dune®	Southerly®	Shale Grey™	Bluegum®	Windspray®	Gully™
DW	SM	SS	CC	PA	DU	SO	SH	BM	WS	GY
Jasper™	Wallaby®	Basalt®	Woodland Grey®	Monument®	Night Sky®	Ironstone®	Deep Ocean®	Cottage Green®	Pale Eucalypt®	Manor Red®
JA	WA	BZ	WG	MO	NS	IS	DO	CO	PE	MN

SIZE (mm)	UNPAINTED CODE	PAINTED CODE	
6.5 x 55	SUHT8650551	Add Color Code at the MIDDLE after SUHT8	SUHT8__0551
6.5 x 55	SUHT8650557	eg: SUHT8BM_	SUHT8__0557
6.5 x 70	SUHT8650701		SUHT8__0701
6.5 x 70	SUHT8650707		SUHT8__0707



BREMICK CORROSION PROTECTION WARRANTY AUSTRALIA

June 2023

ENVIRONMENTAL CONDITIONS	WARRANTY PERIOD		
	ARMOURCOAT™ 3 AS 3566 Class 3	ARMOURCOAT™ 4 AS 3566 Class 4	REVOLUTION B8 AS 3566 Class 4
 <p>MILD URBAN/RURAL (ISO 9223 CATEGORY 2) Most areas of Australia & NZ beyond 50km from the sea but can be as close as 1km from seas that are relatively sheltered.</p>	10 YEARS	20 YEARS	30 YEARS
 <p>MILD/MODERATE MARINE, MODERATE INDUSTRIAL (ISO 9223 CATEGORY 3) Coastal areas with low salinity, urban and industrial areas with low pollution, varies significantly with factors such as winds, topography and vegetation.</p>	10 YEARS	20 YEARS	25 YEARS
 <p>SEVERE MARINE (ISO 9223 CATEGORY 4) Occurs mainly on the coast in areas with rough seas and surf it extends from several hundred metres to 1km inland.</p>	NOT RECOMMENDED	15 YEARS	20 YEARS
 <p>VERY SEVERE INDUSTRIAL (ISO 9223 CATEGORY 5*) Aggressive industrial areas.</p>	NOT RECOMMENDED	NOT RECOMMENDED	15 YEARS
 <p>VERY SEVERE MARINE (ISO 9223 CATEGORY 5*) C5 zones are characterised by salt in the air but not impacted by salt spray /mist. Typically the distance from the shoreline for C5 zones are: <ul style="list-style-type: none"> • 50m to 500m inland from the shoreline of breaking surf or rough seas and areas exposed ocean spray • 100m to 500m inland from open expanses of water exposed to onshore winds, but not typically prone to breaking surf • Up to 50m inland from calm or protected areas of salt or brackish water, including ports, harbours, bays and river estuaries </p>	NOT RECOMMENDED	NOT RECOMMENDED	10 YEARS

Due to changes in the Consumer Warranty Laws, Bremick has aligned the warranty period for its products to be consistent with the warranty period of the major roofing material suppliers. AS3566.2 Outdoor Exposure testing results indicate the lifespan of our products to extend beyond the warranty period.

Assessment of environmental conditions to be in accordance with ISO 9223.
 *ISO 9223 Category CX ("Extreme Marine" Corrosion zones) are characterised by ocean spray /mist and can extend up approximately 100-150m inland.
 When building in Category CX zones, normally Aluminium or Stainless Steel cladding materials are recommended which require the use of Stainless Steel fixings.
 Please consult your local Bremick representative for further advice on warranties and the most suitable fastener for the application

FOR MORE INFORMATION CALL +61 (0)2 8332 1501

BREMICK



Build it better with
BREMICK



CONTACTS

SYDNEY

☎: 02 8332 1500

NEWCASTLE

☎: 02 4014 0400

BRISBANE

☎: 07 3273 9700

TOWNSVILLE

☎: 07 4729 4900

ADELAIDE

☎: 08 8368 5900

MELBOURNE

☎: 03 8710 7400

PERTH

☎: 08 9233 3400

DARWIN

☎: 08 8997 5800

AUCKLAND

☎: +64 (09) 525 2244
Toll Free: 0800 658 075

CHRISTCHURCH

☎: +64 (03) 365 8998
Toll Free: 0800 106 670

DISCLAIMER, WARRANTIES AND LIMITATION OF LIABILITY

This publication is intended to be an aid for all trades and distributors involved with the installing or distributing of Bremick products.

Except to the extent to which liability may not lawfully be excluded or limited, Bremick Pty Ltd will not be under or incur any liability to you for any direct or indirect loss or damage however caused, which you may suffer or incur in connection with this publication.

Bremick advises that the relevant Roofing and Cladding sheeting manufacturers design and installation manuals be adhered to and a suitable product form our range be selected.